

SUNKOLL TILE LOBSTER


Technical Data Sheet

SUNKOLL[®]
ABILITY ♦ STABILITY ♦ DURABILITY

नए भारत क नई ताकत

SUNKOLL TILE LOBSTER is primarily used in the construction and design industries, particularly for flooring and wall applications. Its main applications include Residential Flooring, Commercial Spaces, Outdoor Areas, Decorative Walls As a back-to-back Primer of Stone and Tiles.

How To Use

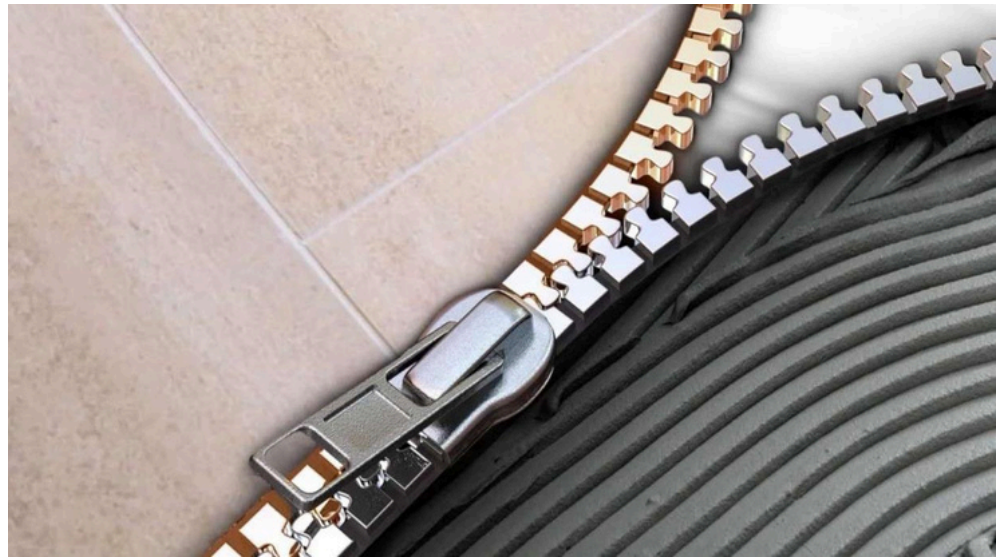

Technical advantage of SUNKOLL TILE LOBSTER

- Promotes high adhesion to various substrates including non-porous porcelain tile.
- Enhance impact resistance.
- Excellent water resistance.
- Excellent heat resistance.
- Quick drying time.

www.sunkoll.com

Water Proofing Chemicals | Adhesives | Grouts/Epoxy Grouts | Wall Putty

Applications

Areas of application

- SUNKOLL TILE LOBSTER is used to manufacture building adhesives and primers with improved water resistance and good adhesion to mineral and glazed surface, such as back tile adhesives.
- Back tile adhesives with SUNKOLL TILE LOBSTER retains excellent adhesion to porcelain tiles even after long term water treatment.
- The high resistance against water and alkaline enable a more durable solution for the customer.
- Additionally, the rollable application of back tile adhesives enables a quick and reliable application on the job site.
- Trials must be performed in advance since the performance of SUNKOLL TILE LOBSTER can be influenced by other additives and materials involved.

Chemical Nature

- Carboxylated styrene-butadiene copolymer dispersion

Features

- APEO, ammonia, and formaldehyde free

Technical Performances

Physical State	Liquid
Shelf Life	24 Months
Packaging Size	500 g, 1 to 5 Kg
Tiles Size	Up To 4 m ²
Coverage	3.5 to 4m ² (40 to 45 Feet ²) per Kg

Properties

Product type	Polimor resin
Appearance	White liquid.
Finish	Thiknes
PH Value	7.0 - 8.5
Specific Gravity (water = 1)	0.9 - 1
Viscosity (Ford cup no. 4)	13°C5/<0RMP MPA:5 1000-7000
Application tools	Brush, roller
Drying time at 25 °C	15 TO 25 Minutes

Safety

General

- The usual safety precautions when handling chemicals must be observed.
- These include the measures described in Federal, State and Local health and safety regulations, thorough ventilation of the workplace, good skin care and wearing of protective goggles.

Safety Data Sheet

- When using this product, the information and advice given in our Safety Data Sheet should be observed.
- Due attention should also be given to the precautions necessary for handling chemicals.

Labeling

- According to all the data at our disposal, SUNKOLL TILE LOBSTER does not need to be labelled as a dangerous
- substance or preparation as defined in the relevant local directives according to their current status.



SUNKOLL Green Building Index :

SUNKOLL Range of Products are most eco-friendly and suitable to use in all kind of buildings including certified green. Apart from using best of international raw material for best performance, SUNKOLL procure the major raw material locally to safeguard environment.

SUNKOLL Quality & Safety Assurance

Products supplied are safe to use by any worker at site. However proper tools and safety measures must be in place for prolong working. The gloves, safety glasses and other protection measure must be followed as per local regulation.

Declaration :

Check before using the product about performance and final expected results. **SUNKOLL** cannot be held All the above information and results are provided based on **SUNKOLL** internal quality test. Customer must responsible for any damage of whatsoever nature at site.

**UNIT - 1 SUNKOLL INDUSTRIES
LIMITED**

Plot No. 62, Tarang Industrial Estate
Hadamta Ta. Kotda Sangani N.H. 8-B
Rajkot(Gujarat) - 360 311

UNIT - 2 SUNKOLL INDUSTRIES LIMITED BARODA

UNIT - 3 SUNKOLL INDUSTRIES LIMITED JAIPUR

UNIT - 4 SUNKOLL INDUSTRIES LIMITED GUWAHATI

TECHNICAL SERVICES & CUSTOMER CARE MANAGER : +91 70698 82251

TOLL FREE : 1800 890 2343

Email: sunkollindltd@gmail.com